

CWTC10

Wireless Touchpanel Controller




**Xantech's
new 10.4" WiFi
touch panel
is the logical
addition to the
all new WIC1200
Web Intelligent
Controller.**

Xantech's new 10.4" WiFi touch-panel is the logical addition to the all new-WIC1200 Web Intelligent Controller. Rounding out an automation or control system, the CWTC10 functions as a full 10.4" wireless control panel-- perfect for any commercial or institutional applications such as conference rooms and classrooms.. Running Windows CE in Kiosk mode, the CWTC10 provides full-blown PC power with a full-color 800x600 vibrant control panel interface. When used with (but not limited to use with) Xantech's WIC1200 Intelligent Controller, the CWTC10 is the perfect user interface for controlling A/V Teleconferencing systems with a large, but not overbearing, easy-to-use 10.4" display.

Since the touch-panel runs on Windows CE and is fully web-capable, the CWTC10 is a solid platform for using any Macromedia Flash web-enabled control page which can be served using the WIC1200 or any web server on the network. Made of durable water resistant plastic, the CWTC10 has a built in kick-stand for any table-top control application.

Since it runs on Windows CE and is fully Web capable, the CWTC10 is a perfect platform for utilizing any Macromedia Flash Web enabled control page which can be served using the WIC1200 or any Web server on the network.

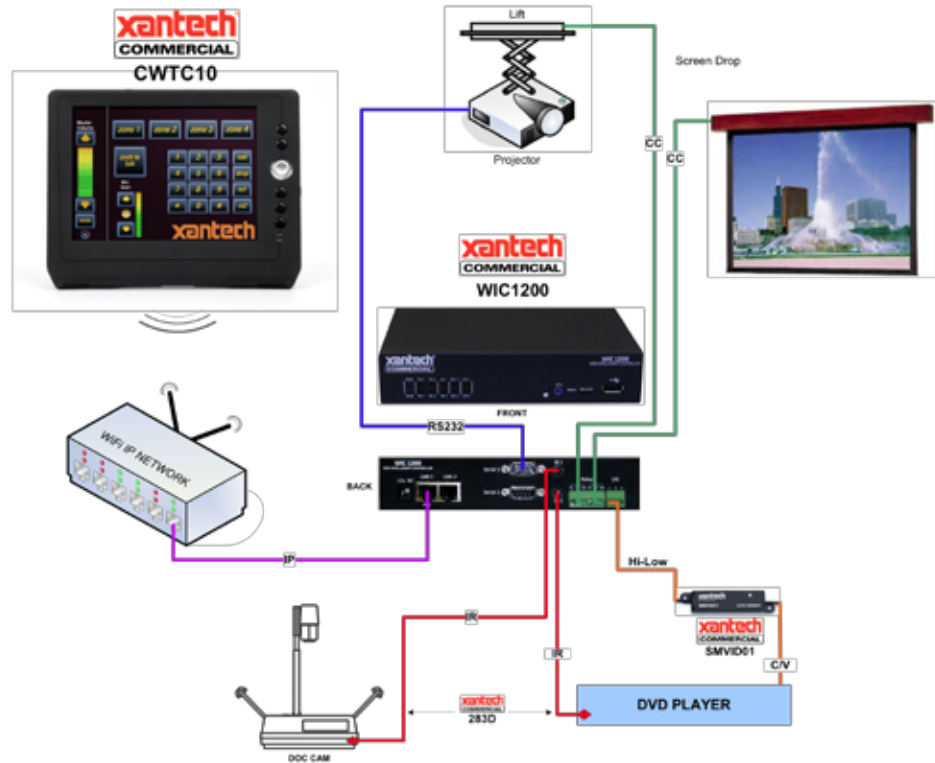

Typical applications:

- Conference and boardrooms
- Classrooms and training rooms
- Hotel registration desks

Features and specifications:

Processor and Memory

- 32 bit Geode LX600 Microprocessor
- 128MB RAM
- 256MB CF

Display

- 10.4" 800 x 600 pixels
- 400 Nits brightness
- Four-wire touch resistive

Connections

- RJ-45 10/100 LAN
- 2 USB 2.0
- 1 VGA
- DB-9 RS-232
- Line input
- Headphone
- Internal speakers
- Internal microphone
- WIFI (internal 802.11b/g/n)

Enclosure:

Water Resistant Plastic with built in stand

Power Supply

- 19v DC brick supply
- Battery Life: 4 hours full power continuous operation; up to 8 hours with power saving mode settings

Operating System:

Windows CE 5.0 Operating System

Physical

- Dimensions 295 mm/11.6 in (W) x 235 mm/9.25 in (H) x 28 mm/ 1.1 in (D)
- Weight: 1.35 kg/2.97 lbs (with primary battery pack & 10.4" Panel)
- Cradle Station 1 x DC-in jack

Environmental

- Operating temperature: 0° ~ 40° C (32° ~ 104° F)
- Storage temperature: -20° ~ 60° C (-4° ~ 140° F)
- Operating humidity: 30% ~ 90%
- Water/dust protection on panel side
- Vibration/shock: IEC 68-2-27
- EMI/Safety FCC class B, CE, UL/CUL, BSMI, VCCI

PN# 08008831

© 2010 Xantech Corporation. All rights reserved.

This document is copyright protected. No part of this document may be copied or reproduced in any form without prior written consent from Xantech Corporation. Please note: this document contains current, new and forthcoming products from Xantech and includes preliminary features, specifications and images.

Due to Xantech's policy of continuous improvement the availability, design, features, specifications and prices of all products included in this document are subject to change without notice. Xantech Corporation shall not be liable for consequences resulting from any product changes or operational, technical, or editorial errors/omissions made in this document. Apple and iPod are trademarks of Apple Computer. Decora is a trademark of Leviton Manufacturing. TOSLINK is a trademark of Toshiba Corporation. Legrand is a trademark of Legrand. All other trademarks are the property of their respective owners.

xantech
COMMERCIAL